



## HS-103B-HD-AN Technical Data Sheet

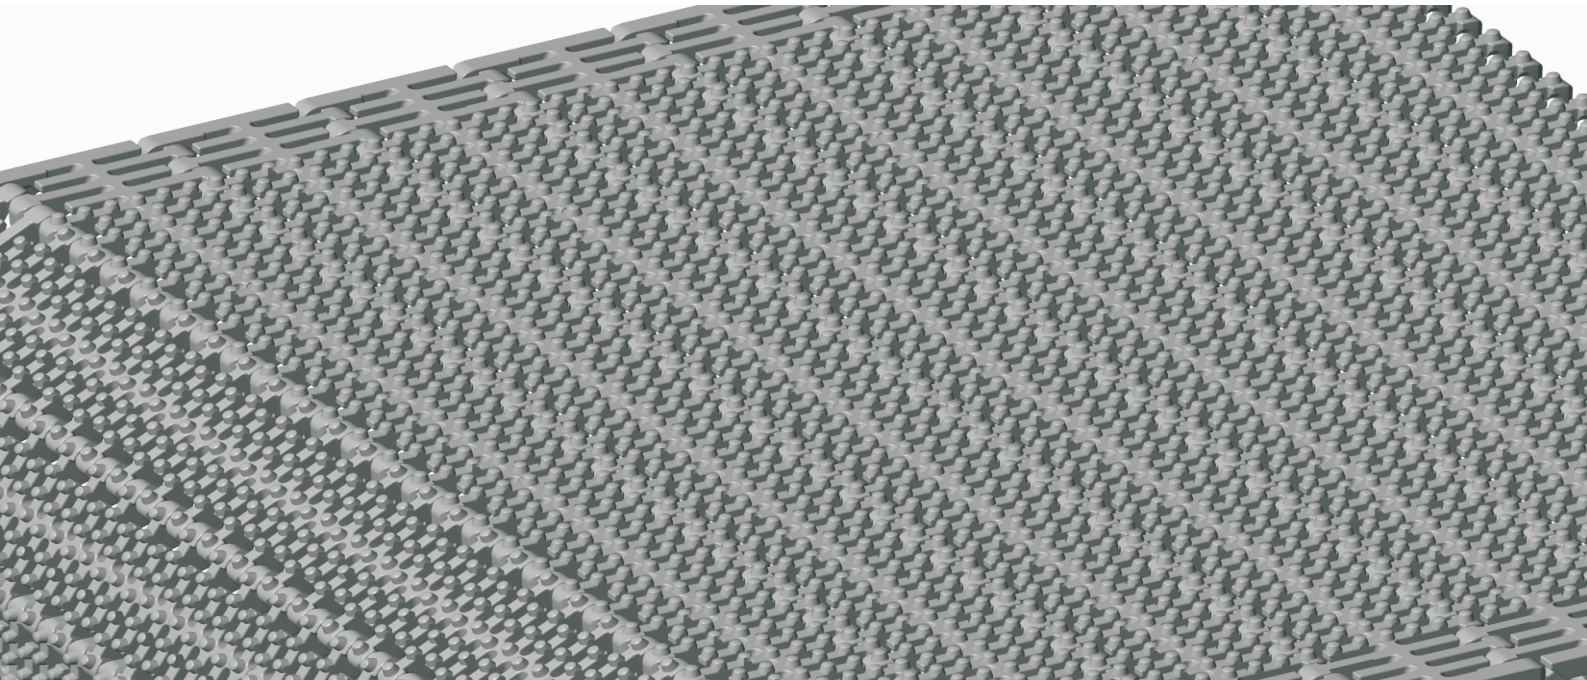

Pitch: 50.8mm  
 Minimum Width: 150.3mm  
 Open Area: 27%  
 Approved: FDA  
 Rod: Ø 5.8mm  
 Flight: Yes  
 Side Guard: No  
 Curve: No

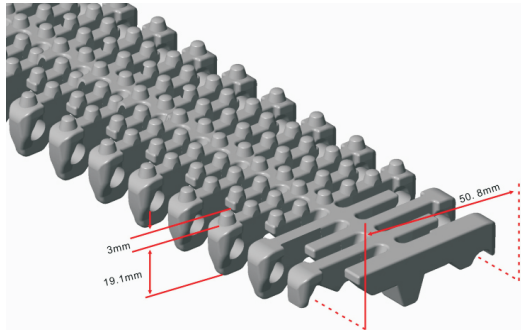

## Data

Belt Material	Belt Strength			Temperature		Belt Weight
	Straight		Curve	°C (min.)	°C (max.)	(Kg/M <sup>2</sup> )
	Kg/M(BW)	N/M(BW)				
Polypropylene	1340	13400	--	1	100	7.7
Polyethylene	1280	12800	--	-60	60	9.03
Acetal	1770	17700	--	-40	80	11.6

**BW – Belt Width**

## Color Table

Polypropylene					Polyethylene					Acetal					Nylon				
W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B	W	G	N	DB	B
●	●						●			●				●				●	

W-White, G-Gray, N-Nature, DB-Dark brown, B-Blue

## Friction Table


Belt Material	Friction Wear strips & Products							
	UHMW	HDPE	Steel	Glass	SUS	Plastic	Cardboard	Aluminum
Polypropylene	0.32	0.24	0.15	0.09	0.13	0.08	0.15	0.25
Polyethylene	0.13	0.11	0.26	0.19	0.31	0.16	0.21	0.41
Acetal	0.11	0.09	0.27	0.16	0.26	0.15	0.19	0.28
Nylon	0.18	0.13	0.25	0.16	0.26	0.16	0.19	0.27

SUS – Stainless Steel

## Equivalent type with other Brand

Brand Name	Intralox	UNI	Rexnord	MCC	Habasit	KVP
Series & Type	800					

The above content is only for reference

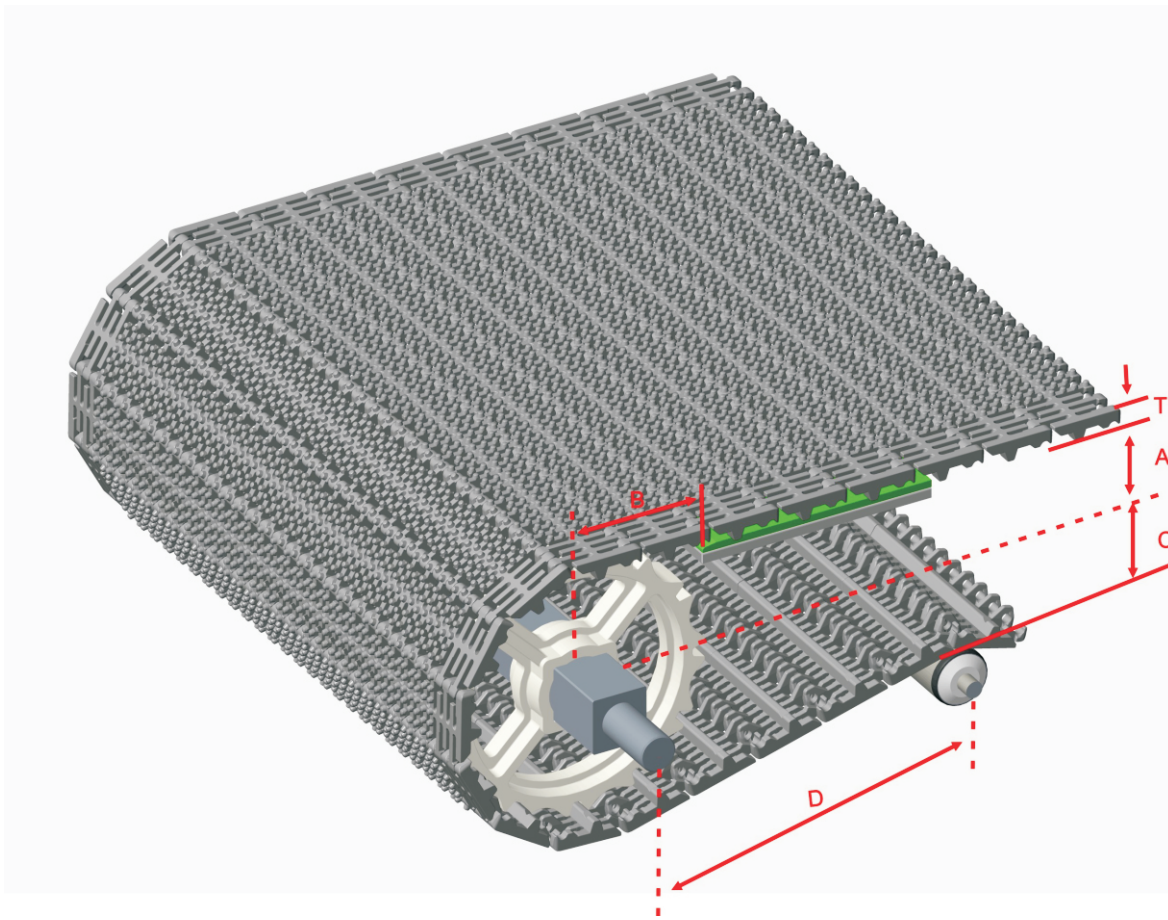


**Conveyor Frame Dimensions**

Unit : mm

No. Teeth	A ( Min. )	B ( Min. )	C ( Max. )	D ( Min. )	T	T1
6	36.55	54.55	32.55	250	16	3
6/N	40.1	58.1	36.1	250		
8 / 8/N	53.65	71.65	49.65	250		
10 / 10/N	70.65	88.65	66.65	250		
12 / 12/N	87.4	105.4	83.4	300		



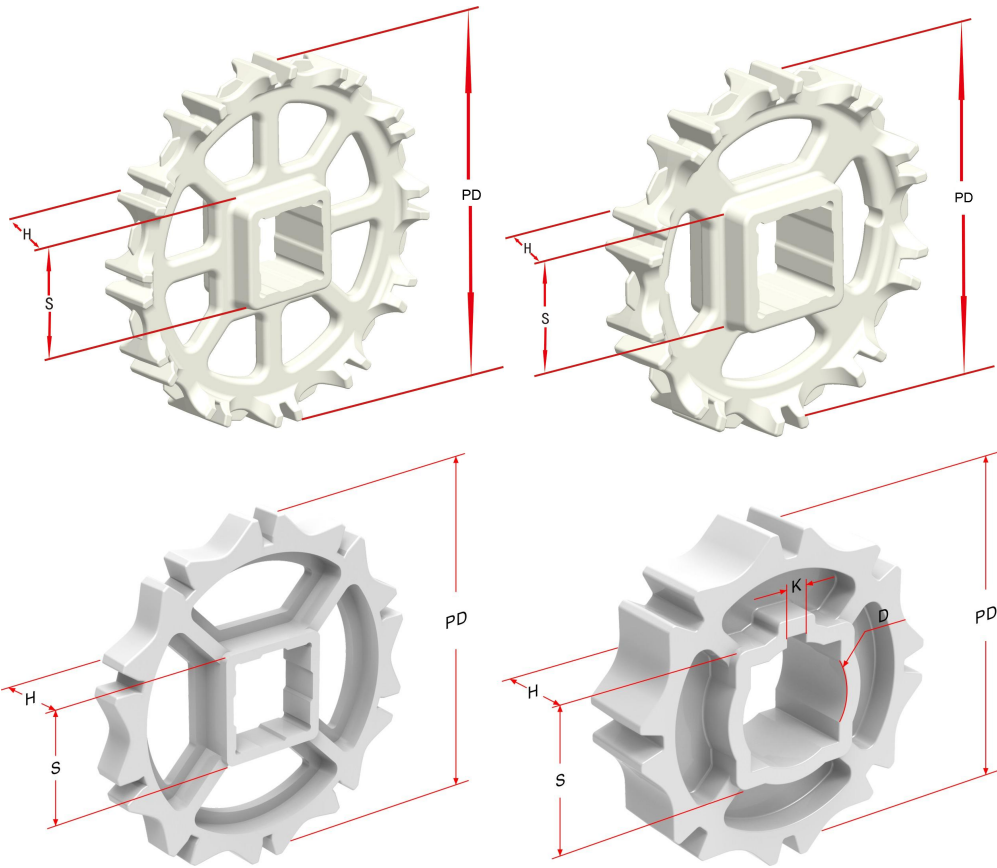

**Sprocket Dimensions**

**Unit : mm**

No. Teeth	PD	S	D	H	K
6	89.1	25.4/38.5/40.5	25.5/45.5	37	8X8
6/N	96.2	25.4/38.2	25.4/31.75	37	6.35X3.17
8	123.3	38.5/40.5	25.5/30.5	37	6.35X3.17
8/N	123.3	38.5/40.5	25.4/25.5/30.5/31.75	37	6.35X3.17
10	157.2	38.5/40.5	30.5	37	8X8
10/N	157.3	38.5/40.5/50.8	25.4/25.5/30.5/31.75/35/ 36.5/38.5/50.2/50.8	37	6.35X3.17
12	190.8	38.5/40.5/50.5/60.5	--	37	--
12/N	190.8	38.5/40.5/60.5	--	37	--