

HS-2800-O SERIES



Materials






Sprockets



Applications

Plate Materials: POM-DP, POM-LF

Pin Material: Cold rolled austenitic stainless steel

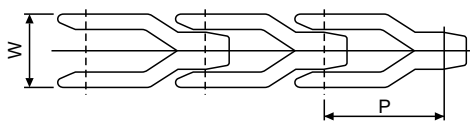

Dimension	mm	inches
P	82.5	3.228
M	50.0	1.969
W	50.0	1.969
H	38.0	1.496
F	19.0	0.748

HS-2800-O (Side Flexing Case Conveyor Chains)

CHARACTERISTICS

	Width W		Working Load		Radius		Reverse Radius		Weight (kg/m)
	(mm)	(inch)	N(21°C)	lbs(21°C)	(mm)	(inch)	(mm)	(inch)	
HS-2800-O	50.0	1.97	6500	1462	660	26.00	75	2.95	1.70