

HS-820-D SERIES



Materials




Sprockets



Applications

Plate Materials: POM-DP,POM-LF

Pin Material: Cold rolled austenitic stainless steel

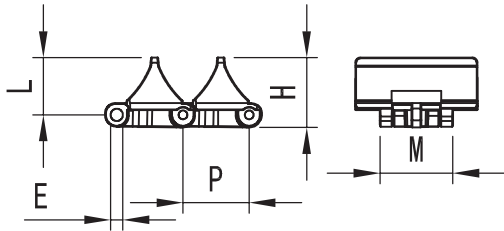

Dimension	mm	inches
P	37.8	1.488
M	41.6	1.638
L	32.7	1.287
H	40	1.575
E	7	0.276
W	70	2.756
H	60.7	2.39

HS-820-D (Straight Running Plastic Chain)

CHARACTERISTICS

	Width W		Working Load		Radius		Reverse Radius		Weight (kg/m)
	(mm)	(inch)	N(21°C)	lbs(21°C)	(mm)	(inch)	(mm)	(inch)	
HS-820-K275-26mm	69.9	2.75	1230	276	-	-	50	1.97	1.00
HS-820-K325-26mm	82.6	3.25	1230	276	-	-	50	1.97	1.03
HS-820-K400-26mm	101.6	4.00	1230	276	-	-	50	1.97	1.30
HS-820-K550-31mm	139.7	5.50	1230	276	-	-	50	1.97	1.45